
# **13**.

# **Detailed Overview of Installation Types**

1		Show	all	all	View 1	View 2
7	7		diffuser horizontal wire	hook wire lock nut turn buckle Al clamp carabine	View 3	
7	7H		wire hanger		View 4	View 5
t	ransparent diffu	ser			View 6	View 7
t	ransparent profi	les			View 8	



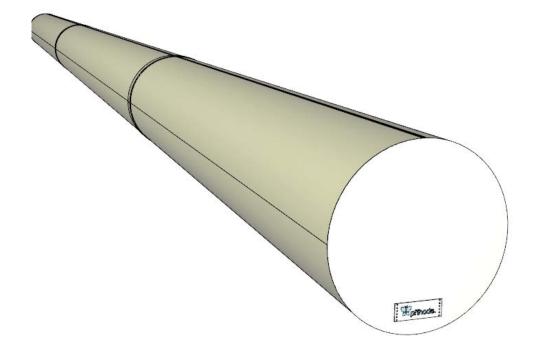

galvanised steel

4/2022





# 4.

# Installation

Installation no.	Cross section view	Type of suspension	Additional accessorie overview chart below	
0	without mounting material a strips	and hooks or enlarged		
1		wire	D, F, K, M	
2		wire	D, F, K, M	
3		profile, velcro	A, B, C, G, J, L, H	
4		profile	D, C, G, H	
5		suspended profile	A, B, C, G, I, D, E, F, K, L, M	
6		suspended profile	A, C, G, I, D, E, F, K, L, M	N
7	•	tensioner	D, F, H can be added to all other installation types	
8		profiles, velcro	A, B, C, G, L, H, J	
9		profiles	A, D, E, F, G,K, L, M	
10		profiles	A, G,L	
11		profiles	A, D, E, F, G, K, L, M	

# Hanging options fixed to the fabric





Enlarged strip (it can be soft, see below)



Plastic snap-hooks (white or black, always white textile strip)



Stainless snap-hooks (same textile strip as for plastic hooks)



Adjustable plastic hook (our 9 standard colours, black clamp)



Textile strip loop (our 9



Gripple brake instead of last



hook



Soft enlarged strip for squeezing in profile is made of hollow plastic





# Hanging systems parts

### 1. For wires







#### Wire supports













# 2. For profiles



### \* Arc hangers limits

#### **Aluminium Arc hangers:**

with tyres: max diameter 1250 mm

up to 1109 mm spacing 2000 mm from 1110 to 1250 mm spacing 1000 mm  $\,$ 

no tyres: max diameter 1600 mm, spacing 2000 mm

#### Stainless steel Arc hanger:

with tyres: max diameter 2000 mm

up to 800 mm spacing 2000 mm from 801 to 2000 mm spacing 1000 mm


no tyres: max diameter 2000 mm

up to 1000 mm spacing 2000 mm from 1001 to 2000 mm spacing 1000 mm





## Profile supports

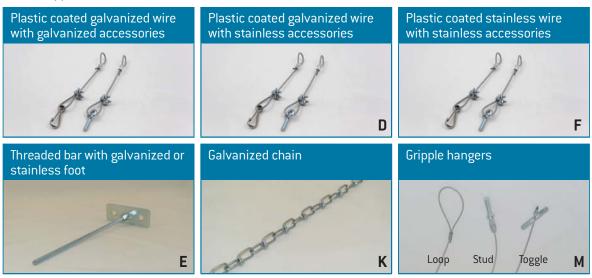

## Fixing to metal ducting

