


## Promat®-WRAP Product Data Sheet Glass fiber fabric for fire resistant ducts



[www.promat-international.com](http://www.promat-international.com)



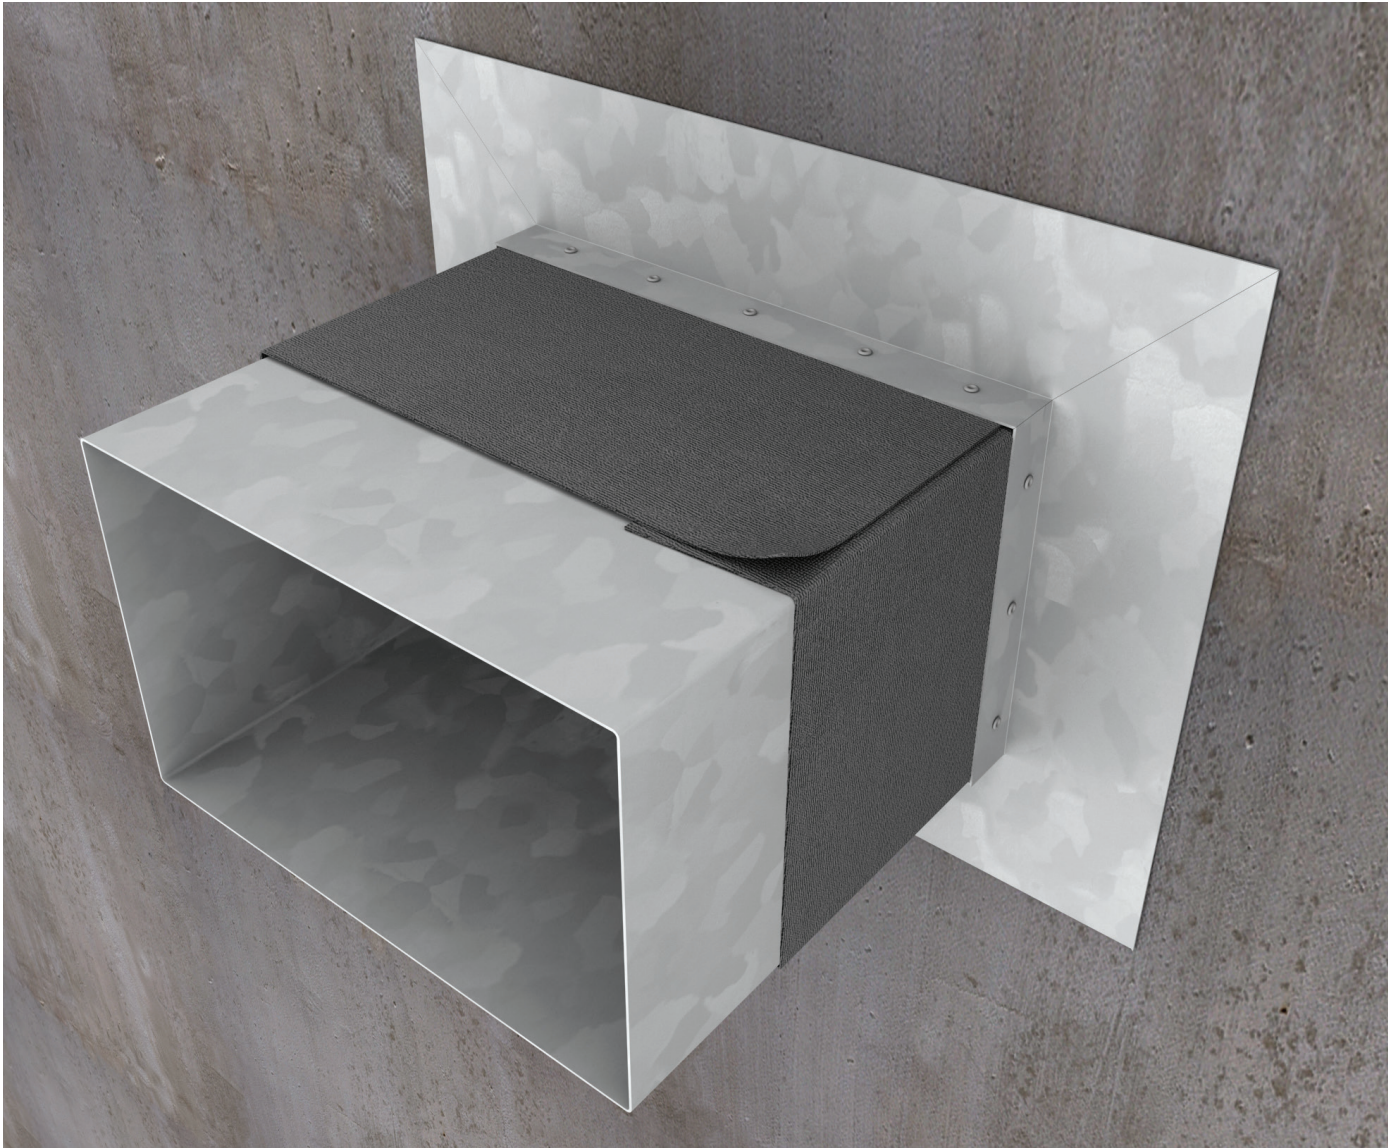

## Description

Promat®-WRAP is a grey, silica-wash treated e-glass fabric, used with galvanised steel ductwork to form Promat®-WRAP Fire Duct systems.

## TREATMENT/COATING DETAILS

40g/m<sup>2</sup> ±10% grey silica wash treatment evenly distributed across both sides of basic fabric.

## HEALTH & SAFETY

For health and safety advice refer to the relevant MSDS sheet available from Promat

## SPECIFICATION

### FINISHED FABRIC

<b>Weight (g/m<sup>2</sup>)</b>	430±5%
<b>Thickness (mm)</b>	0.4±5%
<b>Useable width (mm) (standard)</b>	1270±5%
<b>Roll Length (m) (standard)</b>	50

### BASIC FABRIC CONSTRUCTION

<b>Weight (g/m<sup>2</sup>)</b>	420±5%	
<b>Weave pattern</b>	4H Satin	
<b>Construction</b>	Warp (per cm)	19.2±5%
	Weft (per cm)	11.2±5%
<b>Yarn count</b>	Warp (Tex)	EC9 136
	Weft (Tex)	EC9 136
<b>Tensile strength</b>	Warp (N/5cm)	4800±10%
	Weft (N/5cm)	3700±10%

For further information please contact our technical department.



**Head Office**

**Promat International N.V**

Bormstraat 24

2830 Tiselt

Belgium

Tel: +32 15 718 100

Fax: +32 15 718 109

Email: [info@promat-international.com](mailto:info@promat-international.com)

[www.promat-international.com](http://www.promat-international.com)

[www.promat-tunnel.com](http://www.promat-tunnel.com)

[www.promat-marine.com](http://www.promat-marine.com)

[www.promat-oilandgas.com](http://www.promat-oilandgas.com)